

CEILING SYSTEMS
MESH

1110 series

MESH

A modern looking ceiling profile ideal for open spaces, in airports, metro stations, public transport facilities, & libraries. Can be used as a security ceiling when the mesh is produced in high gauge and proper suspension. Acoustic insulation can provide high acoustics performance. Fully demountable, complying with any accessibility requirements. Offered in a wide range of sizes, colors & finishes.

FEATURES

MATERIAL

Aluminum Alloy as per EN AW 3000 or 5000 series.

Zinc Plated Galvanized Steel G90 grade.

THICKNESS

Aluminum or Galvanized Steel:
0.5mm to 3.0mm

+ Custom thickness are available upon request

SURFACE FINISH

Expanded
Woven

SIZE

WIDTH (mm): 300–1200

LENGTH (mm): 600–2400

+ Custom sizes are available upon request

COATING

Polyester Coating: ((5 μ (Back) + 20 μ (Face))

Polyester Powder Coating: (70 μ -80 μ)

+ High Performance Coatings like PESDF, PVDF and POLYAMIDE are available upon request.

INSULATION

Acoustic Black Fleece is non-flammable and meets the standard DIN 4102 / B1. Classification A1 according to EN 13501-1.

Rockwool slabs conforming to ASTM C612 and equivalent BS 3958-5 are provided for acoustic insulation.

COLORS



DATA / PERFORMANCE



ACOUSTICS

Tested as per BS EN ISO 354: 2003 for sound absorption, noise reduction and sound attenuation.

NRC achieved with Acoustic Black fleece – NRC 0.75

NRC achieved with Acoustic Black Fleece and Rockwool Insulation – NRC 1.00

Tested as per ASTM E1414-11a for Airborne Sound Attenuation as per ISO 10848-2.

CAC can achieved up to – 48 dB

Perforated & Sound Attenuation cover



ANTI BACTERIAL COATING

Tested as per JIS Z 2801: 2000, which inhibits the growth of bacteria on the applied surface.



LIGHT REFLECTANCE (LR)

Achieved by the metal ceiling is LR – 0.85-0.96 tested as per ASTM E 1477.



FIRE PERFORMANCE

Surface Spread of flame Class 1 tested as per BS 476: Part 7: 1997


“Non-Combustible” Material tested as per BS 476: Part4: 1970

Flame Spread and Smoke Development Index tested as per ASTM E84 (Class 1 or A)

RAM 1111 MESH L RAM 1112 MESH C

RAM 1113 MESH H RAM 1114 MESH T

ISOMETRIC DETAIL

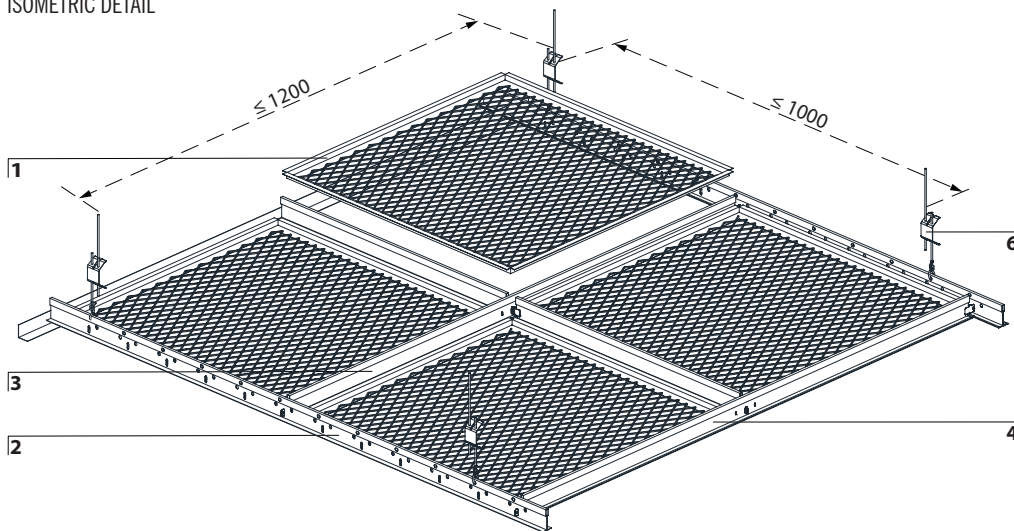


COMPONENTS

- 1 Panel
- 2 Main Carrier
- 3 Primary Cross Tee
- 4 Secondary Cross Tee
- 5 Wall Trim
- 6 Double Adjustment Clip
- 7 Direct Suspension Bracket
- 8 Threaded Rod •
- 9 Anti-Vibration Clip (TR) •
- 10 Wedge •
- 11 Stabilizer •
- 12 Spacer •
- 13 U Bracket •
- 14 Stabilizer Bracket
- 15 Suspension Bracket
- 16 Narrow Carrier
- 17 Z Carrier
- 18 TC Bracket
- 19 Torsion Spring Wire


• Optional

Custom sizes can be offered

OPTIONAL HANGING SOLUTIONS

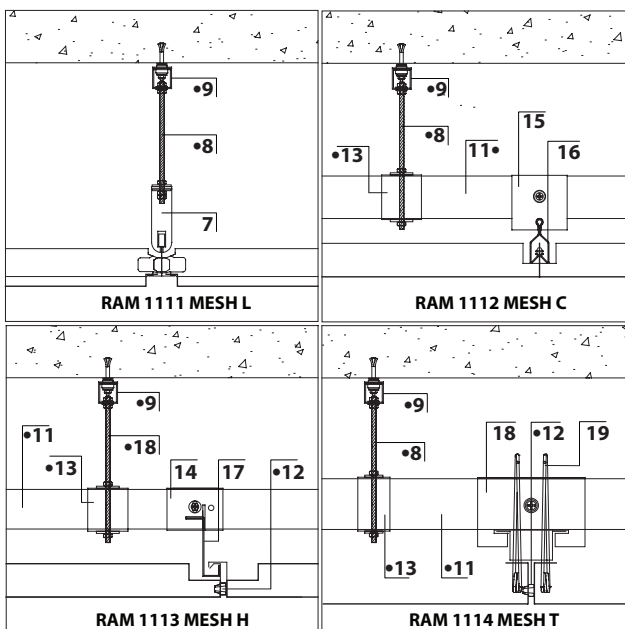

PERIMETER OPTIONS

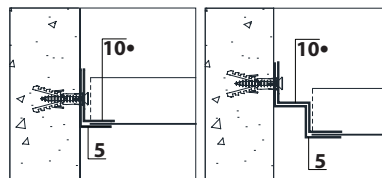

PANEL JOINT DETAIL

