

CEILING SYSTEMS

BAFFLE

950 series

3D

An architectural solution for connecting ceilings to walls. Ideal for open spaces & high ceiling level to view through the void. For airports, metro station, car showroom, & libraries. Can be produced in horizontal as well as vertical curvature and in variable depths up to 1000mm. Acoustic insulation for optimal performance and is fully demountable. A special service tray can be produced to integrate light fitting & other MEP services in order to provide clear finish. Offered in a wide range of designs, sizes, colors & finishes.

FEATURES

MATERIAL

Aluminum Alloy as per EN AW 3000 or 5000 series.

Zinc Plated Galvanized Steel G90 grade.

THICKNESS

Aluminum (mm)

0.5 to 1.0

Galvanized Steel (mm)

0.5 to 0.9

+ Custom thickness are available upon request

SURFACE FINISH

Plain

Perforated

SIZE

HEIGHT (mm): Up to 50mm

WIDTH (mm): 10/20/30

LENGTH: Up to 3000mm

+ Custom sizes are available upon request

COATING

Polyester Coating: ((5 μ (Back) + 20 μ (Face))

Polyester Powder Coating: (70 μ -80 μ)


+ High Performance Coatings like PESDF, PVDF and POLYAMIDE are available upon request.

INSULATION

Acoustic Black Fleece is non-flammable and meets the standard DIN 4102 / B1. Classification A1 according to EN 13501-1.

Rockwool slabs conforming to ASTM C612 and equivalent BS 3958-5 are provided for acoustic insulation.

COLORS

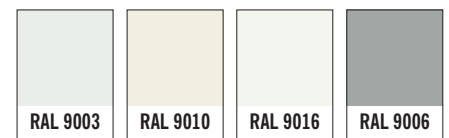


SPECIAL FINISHES



+ See www.rammatal.com for additional colors & special finishes available

+ Special finishes can be provided in lamination, sublimation or coil coating process.

PERFORATION PATTERNS

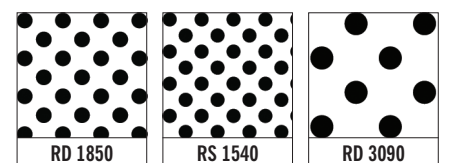

+ See www.rammatal.com for all available pattern options

DATA / PERFORMANCE



ACOUSTICS
 Tested as per BS EN ISO 354: 2003 for sound absorption, noise reduction and sound attenuation.
 Maximum NRC achieved with Acoustic Black fleece – NRC 0.75
 Maximum NRC achieved with Acoustic Black Fleece and Rockwool Insulation- NRC 1.00
 Tested as per ASTM E1414-11a for Airborne Sound Attenuation as per ISO 10848-2.
 Maximum CAC can achieved up to — 48 dB
 Perforated & Sound Attenuation cover



ANTI BACTERIAL COATING
 Tested as per JIS Z 2801: 2000, which inhibits the growth of bacteria on the applied surface.




LIGHT REFLECTANCE (LR)
 Achieved by the metal ceiling is LR- 0.85-0.96 tested as per ASTM E 1477.



FIRE PERFORMANCE
 Surface Spread of flame Class 1 tested as per BS 476: Part 7: 1997
 “Non-Combustible” Material tested as per BS 476: Part4: 1970
 Flame Spread and Smoke Development Index tested as per ASTM E84 (Class 1 or A)

RAM 951 3D

ISOMETRIC DETAIL

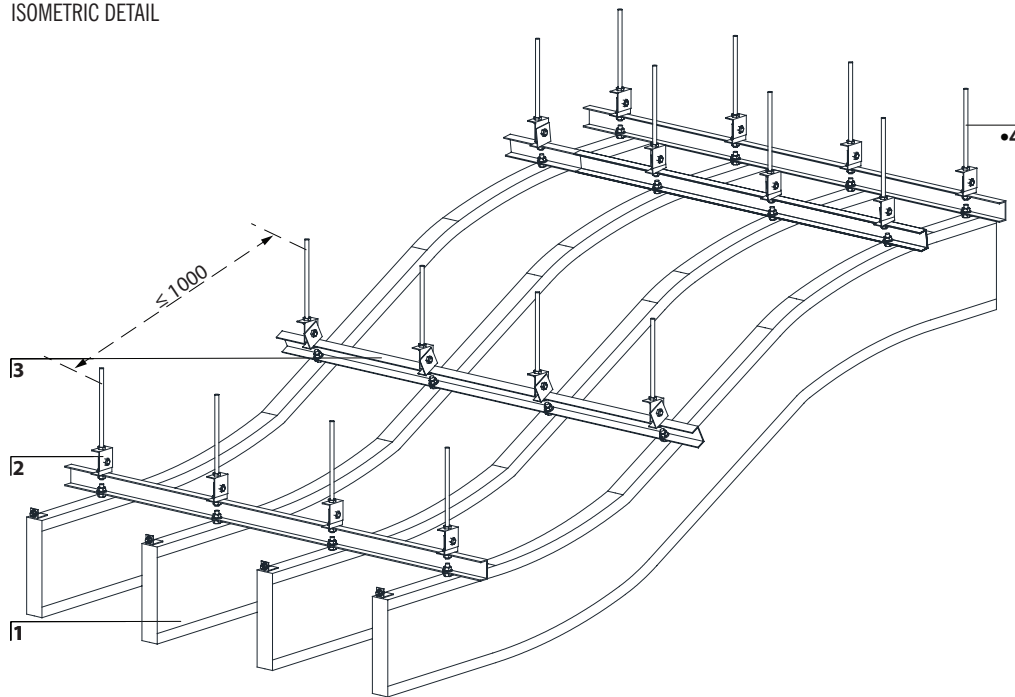


COMPONENTS


- 1 Baffle
- 2 Flexible Bracket
- 3 Stabilizer
- 4 Threaded Rod •
- 5 F Splice
- 6 Expansion Plate
- 7 Hanging Bracket
- 8 L Angle Profile
- 9 Honey Comb
- 10 Nut Bracket

• Optional
 Custom sizes can be offered


OPTIONAL HANGING SOLUTIONS

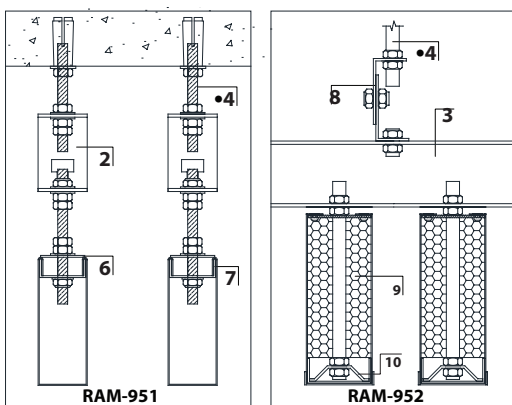

PANEL DESIGN PATTERN

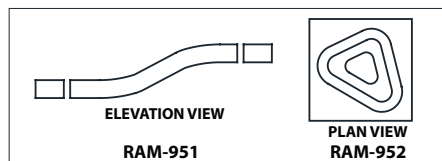

LONGITUDINAL SECTION

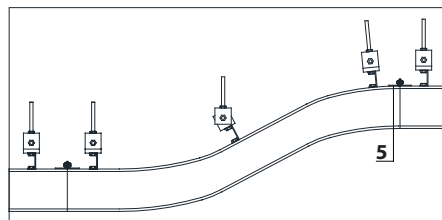

STRIP DETAIL

